

# 4AEX-SF / 6AEX-SF

## 4" & 6" Steel Wrapped Aluminum Shields



### STEEL WRAPPED ALUM. TRENCH SHIELDS


GME's 4AEX-SF / 6AEX-SF series aluminum trench shields with steel tube frames offer greater rigidity to the shield that is ideal for utility work or other spot repair, but are still light enough to be handled by rubber-tire backhoes or small excavators.

#### FEATURES

- 4" and 6" thick sidewalls
- Steel thru-wall collars
- Multiple panel lengths
- Use of 5" Sch. 80 and 8" Sch. 80 spreaders
- Recessed lifting lugs

#### OPTIONS

- Foam Filling
- Pull Eyes
- Knife Edge or No Knife Edge
- Stacking Pockets
- Push Pads

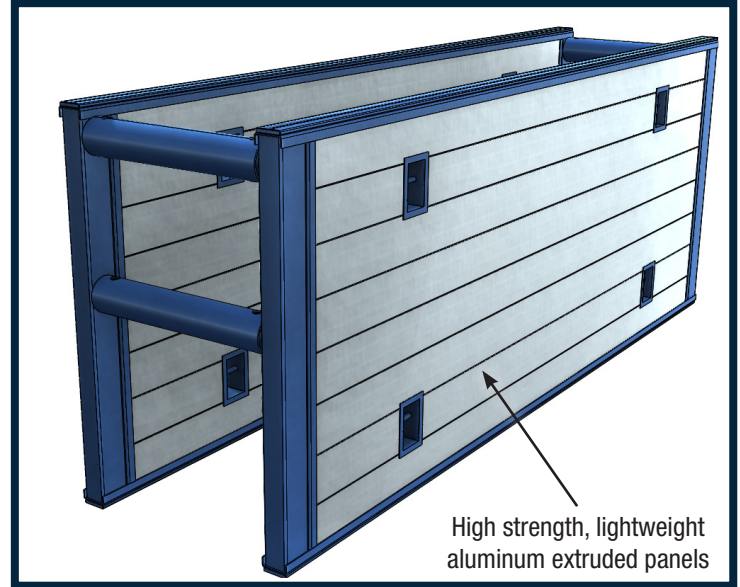

4AEX-SF - 4" STEEL WRAPPED ALUMINUM EXTRUDED WALL									
Model	H	Size		Weight (lbs.)	Pipe Clearance	Maximum Depth Per Soil Type (ft.)			
		L	W			A	B	C-60	C-80
4AEX-412SF	4'	12'	4"	2,370	24"	49	28	21	16
4AEX-416SF	4'	16'	4"	2,920	24"	30	17	14	11
4AEX-420SF	4'	20'	4"	3,520	24"	16	10	8	6
4AEX-612SF	6'	12'	4"	3,950	36"	64	37	28	22
4AEX-616SF	6'	16'	4"	3,680	36"	31	18	15	12
4AEX-620SF	6'	20'	4"	4,400	36"	16	10	8	5
4AEX-812SF	8'	12'	4"	3,530	48"	54	32	25	20
4AEX-816SF	8'	16'	4"	4,600	48"	32	19	16	13
4AEX-820S	8'	20'	4"	5,380	48"	18	12	10	8

The steel wrapped 4" sidewall aluminum trench shield provides depth ratings from 10' for the larger shields, to 21' for the smaller shields (in C-60 soils).

6AEX-SF - 6" STEEL WRAPPED ALUMINUM EXTRUDED WALL									
Model	H	Size		Weight (lbs.)	Pipe Clearance	Maximum Depth Per Soil Type (ft.)			
		L	W			A	B	C-60	C-80
6AEX-816SF	8'	16'	6"	5,350	61"	42	25	20	16
6AEX-820SF	8'	20'	6"	6,400	61"	34	20	16	13
6AEX-824SF	8'	24'	6"	7,355	61"	21	13	11	9

The steel wrapped 6" sidewall aluminum trench shields is the perfect balance of lighter weight for smaller excavators, but strong enough for maximum production.

5DS SPREADER SETS: LOOSE 5" SCHEDULE 80 PIPE		
Model	Inside Width	Weight (lbs.)
5DS24	24"	198
5DS30	30"	259
5DS36	36"	305
5DS42	42"	352
5DS48	48"	394
5DS60	60"	473
5DS72	72"	557
5DS84	84"	641
5DS96	96"	725
5DS108	108"	809

8DS SPREADER SETS: LOOSE 8" SCHEDULE 80 PIPE		
Model	Inside Width	Weight (lbs.)
8DS24	24"	387
8DS30	30"	474
8DS36	36"	561
8DS42	42"	647
8DS48	48"	734
8DS60	60"	908
8DS72	72"	1,081
8DS96	96"	1,428
8DS120	120"	1,776
8DS144	144"	2,123

